

GETEC


Hydroweld *HW 250-5.5*

Hydraulically driven **DC WELDER – AC GENERATOR**

Voltage
120 V or
120/240 V

AC POWER
5500 WATT

FREQUENCY
60 HZ

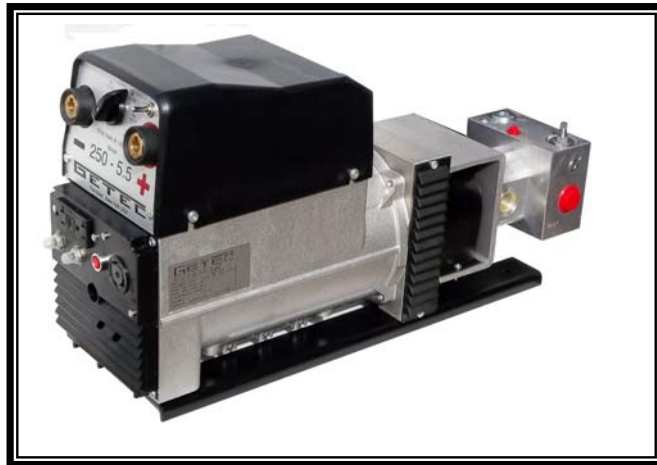

WELDING AMPS	250 AMP
Strike Voltage	78 Volt
Weld Voltage	28 Volt
Operating Speed	3600 RPM

Hydraulic Requirement

Flow	14.5 GPM
Pressure	2200 PSI
Filtration	10 Micron
Max.Oil Temp.	180F

- This Unit combines 2 Functions into one space saving Package.
- You can Weld up to 250 DC Amps
- Use Electric Power up to 5500 Watt while you weld , no switching required
- All this in a Package of 14.5" high , 8.5" wide and 27" long and weights only 137 Lbs
- The Hydraulic Requirement is 14.5 GPM @ 2200 PSI (other Flow requirements are available)

GETEC INC

624 Harris Road
Ferndale New York 12734

(845)-292-0800
<http://www.getec.com>